

NOR 710 Datasheet

Designed as an upgrade to existing fire resistant doors, this perimeter seal can provide additional protection against cold smoke.

It is retro fit with double sided self adhesive which has a strong coat weight (high tack). It consists of a semi-rigid base with 3 flexible blades of optimum angles, these flexible blades act like triple glazing giving maximum acoustic performance along with smoke seal capabilities and energy saving properties.

Key Benefits

- Dual air pocket technology to increase acoustic performance.
- Ultra soft smooth blades to minimise open / closing forces (Doc 'M').
- Excellent recovery values to increase service life (100,000 cycle tested).
- Smoke seal capabilities.
- Not effected by ironmongery.
- Energy efficient.

Fitment Location

Head and jambs of single or double leaf doors.

Min / Max Gap Size

3mm - 4mm

Seal Material


Co-extruded semi-rigid back with flexible blades.

Fixing

Supplied with self adhesive on the base side only fitment is extremely quick and easy, simply fit and forget.

Colours


Stock colours include black, white and brown.

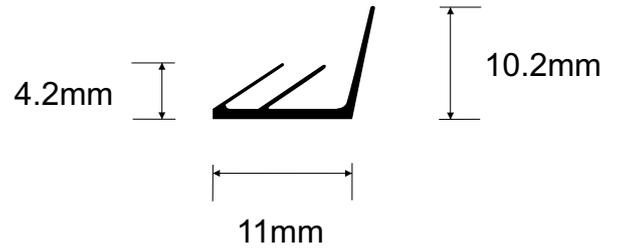

NOR 710 Dimensions



NOR 710 In-Situ

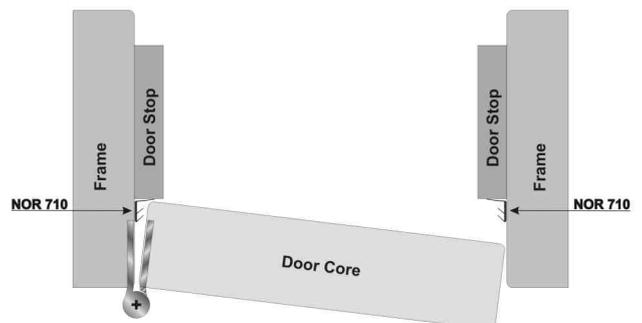

NOR 710 Fitment Position